


SNUBBERS

Reotemp snubbers are a simple cost-effective solution for harmful pressure surges and pulsation. When a Reotemp snubber is installed, it absorbs pulsation and surges. This protects your instrumentation and stabilizes the pointer for easier readings. Snubbers are available in either an adjustable self-cleaning piston design or an economical porous disk design.

POROUS DISK TYPE


Max. PSI	NPT	Porosity	Material	Part #
5,000	1/4"	Liquid	Brass	PXS722BE
		Gas		PXS722BG
	1/2"	Liquid		PXS723BE
		Gas		PXS723BG
15,000	1/4"	Liquid	303SS	PXS722SE
		Gas		PXS722SG
	1/2"	Liquid		PXS723SE
		Gas		PXS723SG

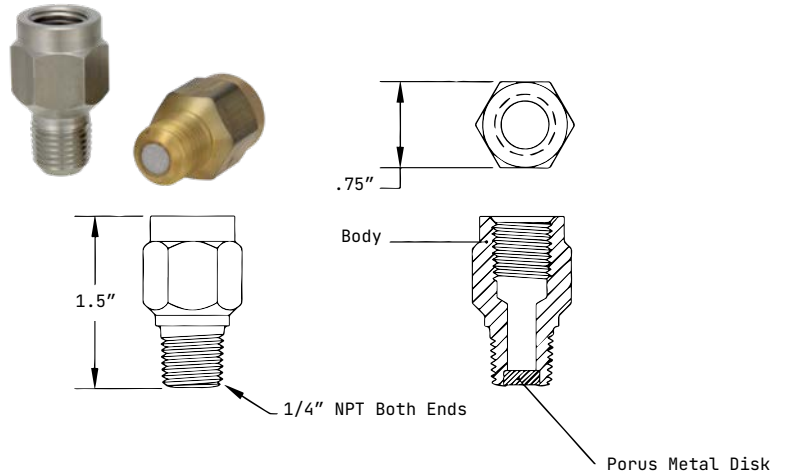

- The Economical Choice for Non-clogging Applications
- Multiple Porosities Available for Various Viscosities

SHORT ORIFICE PISTON TYPE


Max. PSI	NPT	Length (in.)	Material	Part #
5,000	1/4"	1.5"	Brass	PXS022B
			Monel	PXS022M
15,000			303SS	PXS022S
			316SS	PXS022SS
5,000	1/2"	2"	Brass	PXS023B
			Monel	PXS023M
15,000			303SS	PXS023S
			316SS	PXS023SS

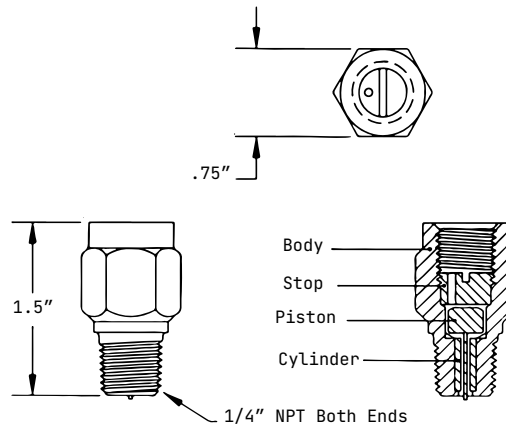

- A Moving Piston Design for Self-cleaning Action
- A Solid Body for High Pressure Resistance
- Three Pistons Included for Adjustable Snubbing

LONG ORIFICE PISTON TYPE

Max. PSI	NPT	Length (in.)	Material	Part #
3,000	1/4"	3.46"	Brass	PXS010B
5,000			303SS	PXS010S
			316SS	PXS010SS
5,000	1/2"	2"	Brass	PXS060B
10,000			303SS	PXS060S
			316SS	PXS060SS

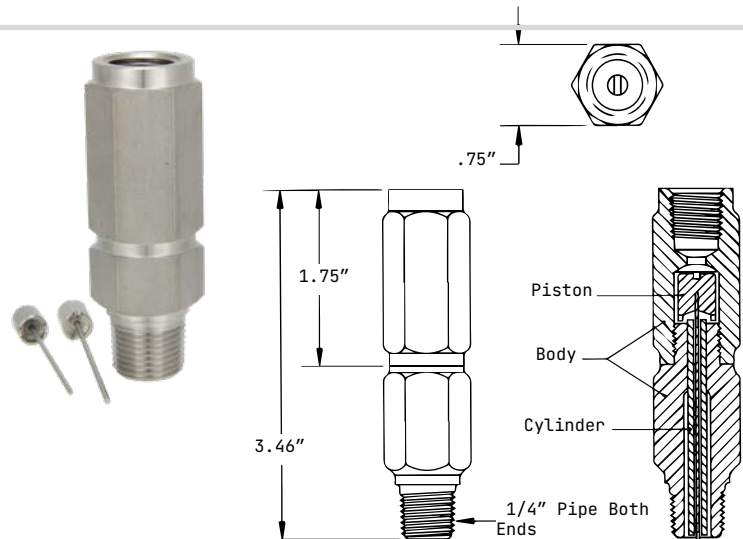

- A Long Orifice for Smoother Snubbing
- A Moving Piston Design for Self-cleaning Action
- Three Pistons Included for Adjustable Snubbing
- Center Joint (1/4" and brass models) for Easier Adjustment